

# Zen Paver

	Metric (mm)	Imperial (in.)
	80 x 190 x 380	3 1/8 x 7 1/2 x 15
Weight/unit (avg.)	12 kg	26 lb
Unit/area (avg.)	18.04 units/m <sup>2</sup>	3.1 units/ft <sup>2</sup>
Area/layer	0.87 m <sup>2</sup>	9.33 ft <sup>2</sup>
Area/cube	7.83 m <sup>2</sup> 9 Rows	83.97 ft <sup>2</sup>
Qty/cube	108 units	108 units
Length/row	4.52 lin. m	14.84 lin. ft
Length/cube	40.72 lin. m	133.58 lin. ft
Weight/cube	1286 kg	2837 lb


  

Code	Colour - Prestige
10300745	Range Amber Beige
10301003	Range Scandina Grey


  

Production location	Bolton
---------------------	--------

### Typical Row



### Laying Pattern

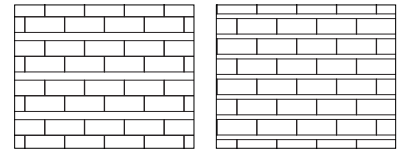

Linear

Linear



### Technical Information

Product	Zen Paver
Standard	CSA A231.2
Void Opening	27%
Flexural Strength	N/A
Compressive Strength	μ 50 MPa ≥ 45 MPa
De-icing salts freeze-thaw durability	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material. Additional details: See our landscaping installation guide on our website (Permeable pavement section).