





AQUASTORM

DESCRIPTION: Paver TEXTURE: Smooth



Specifications per pallet		Imperial	Metric	
 56 units / pallet	Product dimension (L x W x H)	20 1/8 x 10 1/8 x 3 15/16	510 x 255 x 100	
	Cubing	78.39 ft ²	7.28 m ²	
	Approx. Weight	2 245 lbs	1 018 kg	
	Number of rows	7		
	Coverage per unit	11.20 ft ²	1.04 m ²	
	Lin. coverage per row	Depth	13.39 lin. ft	4.08 lin. m
		Length	6.69 lin. ft	2.04 lin. m

Pallet Overview




Laying Patterns Options

01 | Linear

02 | Linear

03 | Herringbone

04 | Herringbone

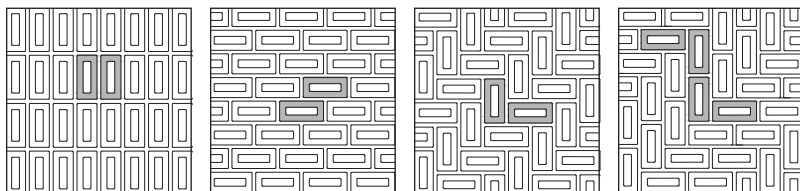

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

NOTES

See page 6 for icons description.

See page 27 for more information about applications.

See page 62 to 64 for more technical information.

When used in a permeable pavement application, see page 28 and 105 for more technical information.

JOINT WIDTH: 1 5/8" (41 mm)

% OF SURFACE OPENING: 38 %

INFILTRATION RATE: 2 395 in./hr (60 842 mm/hr)

WINTER CONDITIONS

De-icing salts should never be used on grass as salt will damage it. The snowblower blade should be set to leave a 3/4 to 1 1/2 in. (2 to 4 cm) tamped snow cover to protect the grass from extreme cold and prevent it from being torn off during snow removal.

Grid pavers are ideal for emergency and service access lanes, boat ramps, and slope protection.

Aquastorm paver meet and exceeds the requirements of ASTM C1319 for Concrete Grid Paving Units.

Please note that for barefoot walking areas (e.g. pool deck) dark-colored paving units could get very hot under the sun.