









D ❄️

ARCHITECTURAL

DESCRIPTION: Cap Double-Sided TEXTURE: Split Face

Specifications per pallet		Imperial	Metric
A 	Dimension Front (L x D x H) A	8 7/8 x 12 1/2 x 2 15/16	225 x 317 x 75
	Dimension Back (L x D x H) A	6 1/2 x 12 1/2 x 2 15/16	165 x 317 x 75
24 units / pallet	Dimension Front (L x D x H) B	11 13/16 x 12 1/2 x 2 15/16	300 x 317 x 75
B 	Dimension Back (L x D x H) B	9 7/16 x 12 1/2 x 2 15/16	240 x 317 x 75
	Dimension Front (L x D x H) C	14 3/4 x 12 1/2 x 2 15/16	375 x 317 x 75
24 units / pallet	Dimension Back (L x D x H) C	12 9/16 x 12 1/2 x 2 15/16	315 x 317 x 75
C 	Dimension Front (L x D x H) C*	14 3/4 x 12 1/2 x 2 15/16	375 x 317 x 75
	Dimension Back (L x D x H) C*	13 9/16 x 12 1/2 x 2 15/16	345 x 317 x 75
8 units / pallet	Cubing	66 lin. ft	20.12 lin. m
C* 	Approx. Weight	2 390 lbs	1 084 kg
	Number of rows	8	
	Lin. coverage per row	8.25 lin. ft	2.51 lin. m
	16 units / pallet		

Pallet Overview

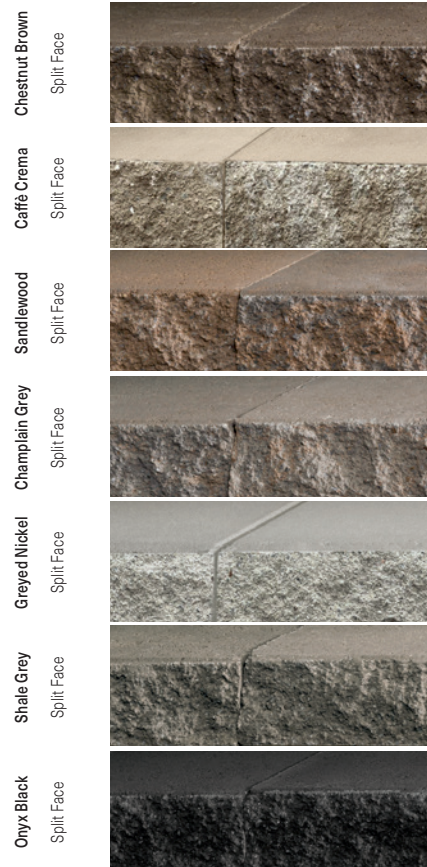

NOTES

See page 6 for icons description.

See page 246 for product compatibility.


The **C*** unit can be used as left and right corner units. It can also be used as a regular unit.

Techo-Bloc always recommends gluing the caps with concrete adhesive to ensure stability and safety.

Please note that for barefoot walking areas (e.g. pool deck) dark-colored paving units could get very hot under the sun.

INSTALLATION GUIDE

CAP RADIUS - ARCHITECTURAL

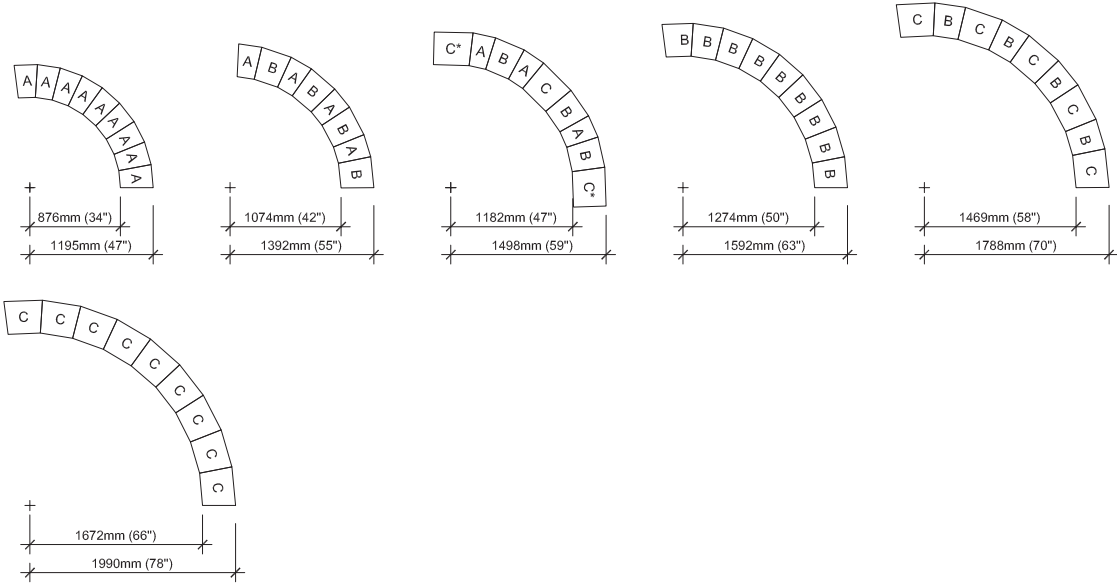

It is the user's responsibility to verify for the quantity of materials required.