




# BLU 60 mm (6" × 13")

**DESCRIPTION:** Slab **TEXTURE:** Smooth and HD² Smooth


## Pallet Overview




## Specifications per pallet




198 units / pallet

		Imperial	Metric
	Product dimension (L × W × H)	6 ½ × 13 × 2 ¾	165 × 330 × 60
	Cubing	116.05 ft²	10.78 m²
	Approx. Weight Smooth	3 138 lbs	1 423 kg
	Approx. Weight HD² Smooth	3 147 lbs	1 427 kg
	Number of rows	11	
	Coverage per row	10.55 ft²	0.98 m²
Lin. coverage per row	Depth	19.5 lin. ft	5.94 lin. m
	Length	9.75 lin. ft	2.97 lin. m

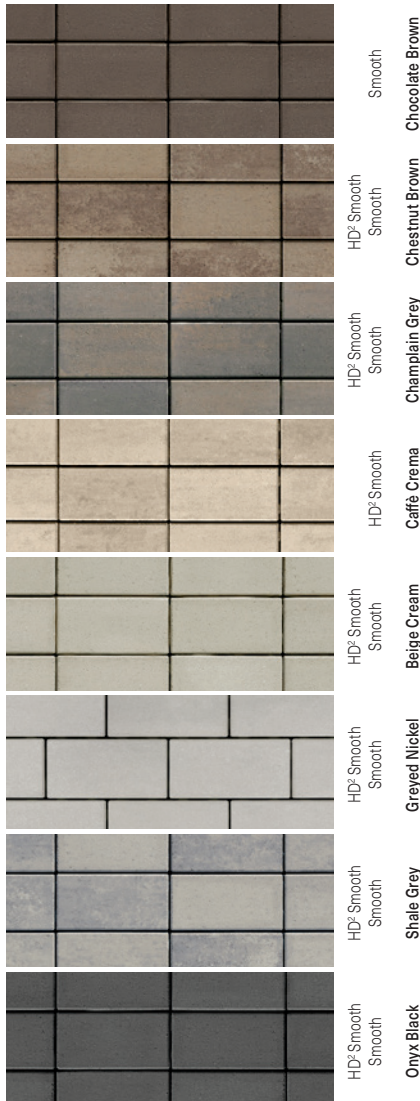

## Laying Patterns Options

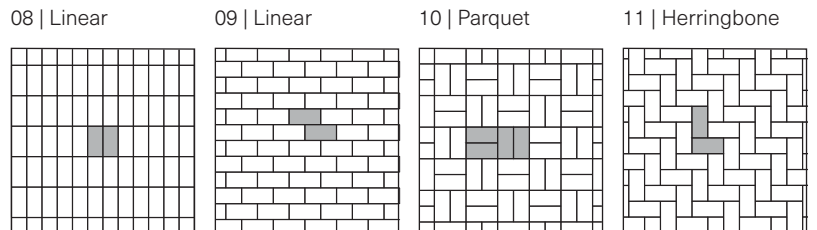

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

## NOTES

See page 6 for icons description.  
 See page 26 for more information about applications.  
 See page 34 to 36 for more technical information. When used in a permeable pavement application, see page 100 to 110 for more technical information.

**JOINT WIDTH:** ½" (7 mm)  
**% OF SURFACE OPENING:** 4.8%  
**INFILTRATION RATE:** 570 in./hr (14 475 mm/hr)

Please note that for barefoot walking areas (e.g. pool deck) dark-colored paving units could get very hot under the sun.