



# Melville® 80 and Melville® 80 DuraFusion Pavers

|                    | Metric (mm)                | Imperial (in.)            |
|--------------------|----------------------------|---------------------------|
| A                  | 80 x 190 x 380             | 3 1/8 x 7 1/2 x 15        |
| B                  | 80 x 380 x 380             | 3 1/8 x 15 x 15           |
| C                  | 80 x 380 x 570             | 3 1/8 x 15 x 22 7/16      |
| Weight/unit (avg.) | 25 kg                      | 56 lb                     |
| Unit/area (avg.)   | 7.39 units/m <sup>2</sup>  | 0.69 unit/ft <sup>2</sup> |
| Area/layer         | 1.08 m <sup>2</sup>        | 11.66 ft <sup>2</sup>     |
| Area/cube          | 8.64 m <sup>2</sup> 8 Rows | 93.28 ft <sup>2</sup>     |
| Length/row         | 3.04 lin. m                | 9.97 lin. ft              |
| Length/cube        | 24.32 lin. m               | 79.79 lin. ft             |
| Weight/cube        | 1625 kg                    | 3583 lb                   |

| Code      | Colour - DuraFusion                                                                          |
|-----------|----------------------------------------------------------------------------------------------|
| 127003275 | Amber  N    |
| 127003121 | Newport  N  |
| 127003088 | Scandina  N |
|           | Colour - Prestige                                                                            |
| 10550869  | Range Amber Beige                                                                            |
| 10550447  | Range Margaux Beige                                                                          |
| 10554764  | Range Chambord Grey                                                                          |
| 10550446  | Range Scandina Grey                                                                          |
| 10550557  | Rockland Black                                                                               |
|           | Colour - Standard                                                                            |
| 10550868  | Range Shaded Grey                                                                            |
| 10550558  | Range Newport Grey                                                                           |

|                     |                                                      |
|---------------------|------------------------------------------------------|
| Production location | DuraFusion: Milton                                   |
|                     | Prestige and Standard: Montreal, Quebec and Metcalfe |

1 bag of Techniseal sand covers approx.: 160 ft<sup>2</sup>

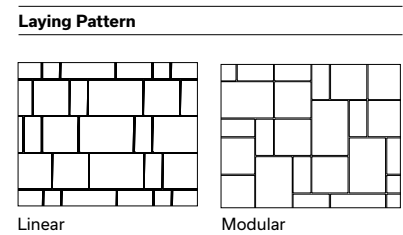

| Technical Information                 |                                                                              |
|---------------------------------------|------------------------------------------------------------------------------|
| Product                               | Melville 80 Paver and Melville 80 DuraFusion Paver                           |
| Standard                              | CSA A231.2                                                                   |
| Flexural Strength                     | N/A                                                                          |
| Compressive Strength                  | μ 50 MPa<br>≥ 45 MPa                                                         |
| De-icing salts freeze-thaw durability | 225 g/m <sup>2</sup> after 28 cycles<br>500 g/m <sup>2</sup> after 49 cycles |
| Density                               | N/A                                                                          |
| Absorption                            | N/A                                                                          |
| Dimension Tolerance*                  | Length: -1.0 to +2.0 mm<br>Width: -1.0 to +2.0 mm<br>Height: ±3.0 mm         |

Joint sand compaction: Cover vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material.