




PURE




DESCRIPTION: Paver **TEXTURE:** Beveled

Pallet Overview*




Beveled Chestnut Brown
Beveled Champlain Grey
Beveled Shale Grey

Specifications per pallet

	Imperial	Metric
A  Product dimension (L x W x H) A	9 x 9 x 3 1/8"	229 x 229 x 80
40 units / pallet	Product dimension (L x W x H) B	12 x 9 x 3 1/8"
B  Cubing	90 ft ²	8.36 m ²
40 units / pallet	Approx. Weight	3 175 lbs
C  Coverage per row	11.25 ft ²	1.05 m ²
40 units / pallet	Lin. coverage per row	15 lin. ft
		4.57 lin. m

Laying Patterns Options

01 | Linear 02 | Herringbone 02 | Modified Herringbone

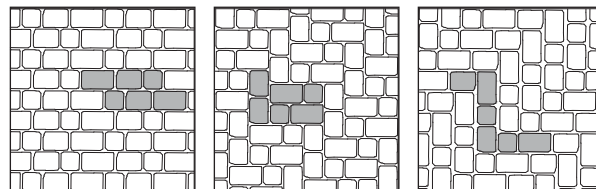

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

NOTES

See page 6 for icons description.

See page 62 to 64 for more technical information. When used in a permeable pavement application, see page 100 to 105 for more technical information.

See page 27 for more information about applications.

JOINT WIDTH: 3/8" (10 mm)
% OF SURFACE OPENING: 5.0 %
INFILTRATION RATE: 726 in./hr (18 440 mm/hr)

The use of permeable pavement systems throughout the world has proven effective in reducing storm water runoff while increasing infiltration rates as it returns the water to the environment. The use of permeable pavers also facilitates LEED® certification easier to obtain.

Please note that for barefoot walking areas (e.g. pool deck) dark-colored paving units could get very hot under the sun.